

# Introduction to SuperCollider workshop, Notam 2019

## Program for the day

1. An overview: What is SuperCollider and what can you do with it?
2. The design and architecture of SuperCollider
3. Language basics: syntax, variables and expressions
4. Functions
5. Learning resources: How to proceed from here

# Who am I?

- Mads Kjeldgaard
- Composer & developer
- Work at NOTAM

# Contact info

## Me

- website: [madskjeldgaard.dk](http://madskjeldgaard.dk)
- github: [github.com/madskjeldgaard](https://github.com/madskjeldgaard)
- email: [mail@madskjeldgaard.dk](mailto:mail@madskjeldgaard.dk)

## Notam

- [notam02.no](http://notam02.no): [notam02.no](http://notam02.no)
- Instagram: [@notam02](https://www.instagram.com/notam02)
- Twitter: [@notam02](https://twitter.com/notam02)
- Facebook: [Notam02](https://www.facebook.com/Notam02)

# SuperCollider meetups in Oslo

- Monthly SuperCollider meetups at NOTAM
- Superduper friendly and fun ( + often has cake)
- Next one is September 9th, 2019
- Not in Oslo? Start your own meetup group!

See the

[SCOslo](#)

group for more info

# What is SuperCollider?

SuperCollider is a platform for audio synthesis and algorithmic composition, used by musicians, artists, and researchers working with sound

It is free and open source software available for Windows, macOS, and Linux.

# Why SuperCollider?

- Open source and free
- 20+ years of development
- Efficient, robust and stable
- Incredibly flexible
- Cross platform
- Unique design concepts and features
- Text based -> fast
- Big community

# What is SuperCollider used for?

- Composition
- Sound synthesis
- Live coding
- Improvisation
- Networked performances
- Installation
- Dance / theater work
- Immersive sound

# Examples

- [Roosna and Flak](#) (Dance performance)
- [Verdensteatret](#) (Theater performance)
- [Renick Bell](#) (Livecoding)
- [Streifenjunko](#) (Improvised music)

**Design**

# Short history of SuperCollider

SC was designed by James McCartney as closed source proprietary software

Version 1 came out in 1996 based on a Max  
object

called Pyrite. Cost 250\$+shipping and could only run on PowerMacs.


Became free open source software in 2002 and is now cross platform.

# Overview

When you download SuperCollider, you get an application that consists of 3 separate programs:

1. The IDE, a smart text editor
2. The SuperCollider language / client (**sclang**)
3. The SuperCollider sound server (**scsynth**)


# Architecture

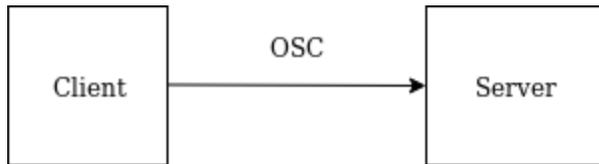

The client (language and interpreter) communicates with the server (signal processing)

This happens over the network using Open Sound Control

# Multiple servers

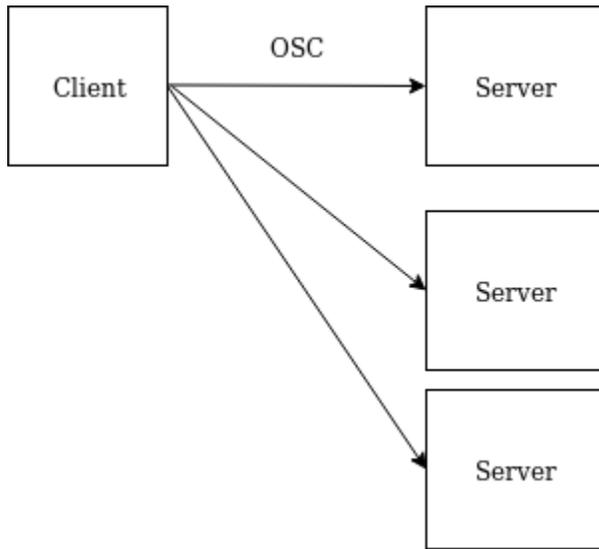

This modular / networked design means one client can control many servers

# Consequences of this modular design

**Each of SuperCollider's components are replaceable**

IDE <---> Atom, Vim, or Visual Studio

language <---> Python, CLisp, Javascript

server <---> Max/MSP, Ableton Live, Reaper

# Extending SuperCollider

The functionality of SuperCollider can be extended using external packages

These are called Quarks and can be installed using SuperCollider itself

```
// Install packages via GUI (does not contain all packages)
Quarks.gui;

// Install package outside of gui using URL
Quarks.install("https://github.com/madskjeldgaard/KModules");
```

# SC Plugins

[SC3 Plugins](#) is a collection of user contributed code, mostly for making sound

The plugins are quite essential (and of varying quality / maintenance)

# IDE

The screenshot displays the SuperCollider IDE interface. The main editor window, titled "Untitled", contains the following code:

```
1 "This is the SuperCollider IDE, a very nice and helpful application that will help you write SuperCollider code, make noise and art".postln
```

The "Help browser" window is open to the "String" class page. It shows the class hierarchy: `String` (array of `Chars`), with sources `String.sc` and `Char`. The description states: "String represents an array of Chars. Strings can be written literally using double quotes: 'my string'.class. A sequence of string literals will be concatenated together: x = 'hel' 'lo'; y = 'this is a\n' 'multiline\n' 'etc...'"

The "Post window" displays the following output:

```
Info: 23 methods are currently overwritten by extensions. To see which, execute: MethodOverride.printAll

compile done
localhost : setting clientID to 0.
internal : setting clientID to 0.

Convenience is possible
ZzzZzZzzzZzzZzzZZzzzZzz

Class tree inited in 0.04 seconds
Ctk init class runs

*** Welcome to SuperCollider 3.10.2. *** For help press Ctrl-D.
SCDoc: Indexing help-files...
SCDoc: Indexed 2413 documents in 2.84 seconds
-> a ServerMeter
This is the SuperCollider IDE, a very nice and helpful application that will help you write SuperC
-> This is the SuperCollider IDE, a very nice and helpful application that will help you write Sup
```

The bottom status bar shows: Interpreter: **Active** Server: 0.00% 0.00% 0u 0s 0g 0d 0.0dB

# Important keyboard shortcuts

- Open help file for thing under cursor: **Ctrl/cmd + d**
- Evaluate code block: **Ctrl/cmd + enter**
- Stop all running code: **Ctrl/cmd + .**
- Start audio server: **Ctrl/cmd + b**
- Recompile: **Ctrl/cmd + shift + l**
- Clear post window: **Ctrl/cmd + shift + p**

# The IDE as a calculator

SuperCollider is an interpreted language

This means we can "live code" it without waiting for it to compile

A good example of this is using it as a calculator

# Autocompletion

Start typing and see a menu pop up with suggestions (and help files)

# The status line

Shows information about system usage

Right click to see server options + volume slider

**Everything in SuperCollider is an object**

# Objects

An object is *an instance* of a class

# **Classes describe how objects behave**

... and what data they contain

# What can an object do?

An **object** is always able to *do* something

This is defined by the methods of its class

Methods are (often) documented and (sometimes) explained in the help files

**Classes inherit functionality**

# **Syntax, strings and variables**

# Hello world

Use `.postln` to post something to the post window (important when debugging):

```
"Hello world".postln
```

# An important point on numbers in SC

As opposed to mathematical convention: there is no hierarchy between operators

If you pick up a calculator and type `2+2*10` the result is probably `=22`

Because normally there is an implicit parenthesis here: `2+(2*10)`.

This isn't the case in SuperCollider:

```
2+2*10  
-> 40
```

# Using brackets to create mathematical hierarchy

SC looks at the first part ( 2+2 ) and calculates it, then multiplies it ( \*10 ).

Therefore: Always use parenthesis when you need mathematical hierarchy:

$$2+(2*10)$$

-> 22

# Syntax

Like with any other programming language, correct syntax is important.

When you get it wrong, the interpreter will give you an error (and thus help you solve your problem)

If for example I wanted to write `9.cubed` but accidentally wrote `9cubed` and evaluated it, I would get the following error

```
RECEIVER: nil
ERROR: syntax error, unexpected NAME, expecting $end
      in interpreted text
      line 1 char 6:
      9cubed
      ^^^^^
-----
ERROR: Command line parse failed
-> nil
```

# Brackets / parenthesis

`()` encapsulates a block of code that is supposed to be executed together `;` is used to mark the end of a statement

An example of a block:

```
(  
a = 111+222+333;  
b = 444+555+666;  
c = 777+888+999;  
)
```

```
a; // -> 666  
b; // -> 1665  
c; // -> 2664
```

# Expressions

The end of an expression is marked by a semicolon ;

SC will interpret everything up until the semicolon as one expression

Example: Two expressions

```
"hello".println; "how are you?".println;
```

This results in the following in the post window:

```
hello  
how are you?  
-> how are you?
```

# Receiver notation

A way of executing a function (message) on an object (receiver)

```
Receiver.message(argument)
```

or

```
message(Receiver, argument)
```

## Receiver notation examples:

`100.rand` same thing as `rand(100)`

`"hello".println` same thing as `println("hello")`

`0.123.round(0.1)` same thing as `round(0.123, 0.1)`

# Comments

// can be used as single line comments:

// This comment is a one line comment Or at the end of a line:

```
10+10; // This comment is at the end of a line
```

/\* \*/ is used for multiline comments. Everything between these is treated as a comment.

```
/*  
Roses are red  
Violets are blue  
SuperCollider is cool  
and so are you  
*/
```

# Strings

A string is marked by double quotes: `"This is a string";`

It is now a String object:

```
"This is a string".class  
-> String
```

# String concatenation

A common string operation is the concatenation of strings

This is done using the `++` operator:

```
"One" ++ "Two" ++ "Three";  
-> OneTwoThree
```

# Symbols

A symbol can be written by surrounding characters by single quotes (may include whitespace):

```
'foo bar'
```

Or by a preceding backslash (then it may not include whitespace):

```
\foo
```

# Why symbols

From the Symbol help file: "A symbol, like a String, is a sequence of characters.

Unlike strings, two symbols with exactly the same characters will be the exact same object."

Symbols are most often used to name things (like synthesizers, parameters or patterns)

Tip: Use symbols to name things, use strings for input and output.

# Variables

A variable is a container that you can store data in:

```
var niceNumber = 123456789;
```

# Variable names

Variable names must be written with a lowercase first letter.

Like this: `var thisWorks` and not like this: `var ThisDoesNotWork`

# Reserved keywords

Another limitation in naming variables: Reserved keywords

These are words used to identify specific things in SC: `nil`, `var`,  
`arg`, `false`, `true`

Example:

```
var var
-> nil
ERROR: syntax error, unexpected VAR,
      expecting NAME or WHILE
in interpreted text
line 1 char 7:
var var
  ^^^
```

# Local variables

Local to a block of code

Must be initialized at the top of the block

```
(  
var aLocalVariable1 = 123;  
  
// contents of block  
)
```

# Environment variables

"Global" in scope, can be accessed throughout the environment

Don't need a `var` keyword in front of them when declared

Can be initialized at any point in the program

# Writing environment variables

1. The letters a-z: `a = "hej";`
2. The tilde (~) prefix `~array = "hej";`

# Demonstration of variable scope

```
(  
// local variable  
var amazingVariable = "hello!";  
  
// This works:  
amazingVariable.postln;  
)  
  
// This returns a "not defined" error:  
amazingVariable.postln;
```

# Syntactic sugar

SC allows the user to write code in different styles using different types of syntax.

The helpfiles [Syntax](#)

[Shortcuts](#) and

[Symbolic](#)

[Notation](#) can be

a big help when this becomes confusing

# Functions

# What is a function?

A function is a reusable encapsulation of functionality

Lets you reuse and call it elsewhere in your code

Repetitive code can often be simplified with functions

# Functions

The core of the function is contained in curly brackets: `{}`

We declare a function like this. Note: This does not evaluate or activate the function yet:

```
{2+2}  
-> a Function
```

A function is evaluated by sending it the `.value` message:

```
{2+2}.value  
-> 4
```

# Syntactic sugar

Tip: `.value` can be omitted by just adding `.()` like so:

`{arg x, y; x+y}.(x:2, y:7)`, although `.value` is usually clearer

# Function arguments

Functions can take arguments (data) as input and do something with them.

Arguments must be declared in the beginning of the function.

To pass values to the arguments, open a parenthesis after `.value`

Here we have named the argument `x`

```
{arg x; 2+x}.value(x: 8)  
-> 10
```

Alternatively, the argument name can be omitted (but then you have to know the order of arguments):

```
{arg x, y; x+y}.value(2, 8)  
-> 10
```

# Named

You can call arguments by their names:

```
{arg x, y; x+y}.value(x:2, y:8)  
-> 10
```

# Mixing named and unnamed arguments

You can mix named and unnamed arguments but you must call the unnamed arguments at the end of the list

**correct way:**

```
{arg x=2, y; x+y}.value(2, y:8)  
-> 10
```

**incorrect way:**

```
{arg x=2, y; x+y}.value(x:2, 8)  
ERROR: syntax error, unexpected INTEGER, expecting ')' in interpreted text
```

# Alternative argument syntax

Instead of writing `arg argname1, argname2` you can put the arguments inside pipe symbols:

```
f = { |x, y| x+y }
```

# Argument default values

You can set the initial value of an argument when declaring it:

```
f = { |x=1, y=4| x+y }
```

# Declaring multiple arguments or variables in one go

You can choose between declaring like this:

```
arg argument1, argument2, argument3;
```

Or like this:

```
arg argument1;  
arg argument2;  
arg argument3;
```

The same goes for local variables

# Functions can be put in variables and reused

```
f = {arg x, y; x + y};  
f.value(2,1000); // = 1002  
f.value(9,22); // = 31
```

# Function returns

All blocks of code in SC return the result of the last statement (in both `()` and `{}`)

This is useful for doing further computations

```
f = {arg x, y; x + y};  
a = f.value(2, 1000); // = 1002  
b = f.value(9, 22); // = 31  
a+b; // = 1033
```

# Learning resources

# Videos

Tutorials by Eli Fieldsteel covering a range of subjects: [SuperCollider Tutorials](#)

# Books

## E-books

- [A gentle introduction to SuperCollider](#)
- [Thor Magnussons Scoring Sound](#)

## Paper books

- [Introduction to SuperCollider, Andrea Valle](#)
- [The SuperCollider Book](#)

# Community

- [scsynth.org](https://scsynth.org)
- [sccode.org](https://sccode.org)
- Slack
- Lurk
- Mailing  
list
- Telegram
- Telegram ES
- Facebook

# Awesome SuperCollider

A curated list of SuperCollider stuff

Find inspiration and (a lot more) more resources here:

[Awesome](#)

[Supercollider](#)

# Learning to code: Advice

- Practice 5 minutes every day
- Set yourself goals: Make (small) projects
- Use the community

